



Department of Property & Procurement

Government of the United States Virgin Islands

3274 ESTATE RICHMOND, CHRISTIANSTED, U. S. VIRGIN ISLANDS 00820

8201 SUB BASE, 3RD FLOOR, ST. THOMAS, U. S. VIRGIN ISLANDS 00802

ST. CROIX MAIN OFFICE: 340.773.1561 | ST. THOMAS MAIN OFFICE: 340.774.0828

ST. CROIX FAX: 340.773.0986 | ST. THOMAS FAX: 340.777.9587

[HTTP://DPP.VI.GOV](http://DPP.VI.GOV)



AMENDMENT ONE (1)

June 19, 2017

TO:

SUBJECT: IFB013BOCC17(C) Purchase & Installation of Perimeter Fence at Golden Grove Adult Correctional Facility & Detention Center, St. Croix

INSERT: New Revised Scope of Work & Questions & Answers

DELETE: Old Scope of Work

All other terms and conditions remain the same.

A copy of this amendment must be returned with your bid.



DIVISION OF ENGINEERING

GOVERNMENT OF
THE VIRGIN ISLANDS OF THE UNITED STATES

PUBLIC WORKS DEPARTMENT
6002 Estate Anna's Hope
Christiansted, St. Croix, V.I. 00820-4428

Tel: (340) 773-1290
Fax: (340) 773-0670

ADDENDUM # 1

DATE: June 16, 2017

IFB013BOCC17(C) – Bureau of Corrections Security Fence Golden Grove,
St. Croix

QUESTION: Will P&P or DPW be obtaining the all required permits?

ANSWER: Yes

Question: Will the contractor be responsible for surveying the fence line?

Answer: No. The contractor will be shown the location as to where the fence will be placed.

Question: Specification for the materials of construction?

Answer: Please see the revised drawings and scope of work.

Question: What are the lengths of each fence run?

Answer: The contractor is responsible for installing 5,992 L.F of an 8ft high fence. Contractor will be paid by the L.F. Please see scope of work.

Question: Where will the gates be located?

Answer: Please see the revised scope of work

Law Fleming 6/16/17
PUBLIC WORKS DEPARTMENT
ST. CROIX
VIRGIN ISLANDS

Question: Are there barbed wire on the top of gates

Answer: Razor wire will be placed on the top of the gates

Question: With respect to the automatic openers, around how many times each gate would be open and closed each day?

Answer: on an average the entrance gate will be open and closed approximately 400 times each day

Question: Also, how will the gate be open and closed? Through remote control, keypad, security guard with a push button station?

Answer: The gate will be open and closed by a security guard push button station.

Question: Where will the electrical power for each gate originate.

Answer: Only one of the gate will be powered and electricity will be obtained from the adjacent pump station

Question: What are the requirements for the decorative island

Answer: Some landscaping with flowers

Question: Where will the paved turn around be located? How large? Will curb be required?

Answer: The turnaround will be approximately 100'x40' with no curb and it will be located by the security guard booth.

Question: Will it be necessary to level the fence line to one elevation or will staggered fence elevations be acceptable?

Answer: The contractor is expected to follow the contour of the land

Question: Using the staggered fence elevation, what will be used to fill in the bottom?

Answer: A continuous concrete footing (12") will be constructed under the fence to hold the wire in place

Question: Will there be buried concrete wall at the fence line

Answer: Yes. Please see the revised drawings

Question: How many large trees will have to be removed?

Answer: Please see the revised scope of work. A Lump sum cost is placed in the scope of work for this task

Question: Will there be any demolition of existing structures, fence e.t.c?

Answer: No

Question: Are there existing underground utilities that must be avoided?

Answer: The fence will straddle the perimeter of the gut and there are not utility lines in that area. Secondly no major excavation will be taking place except for the footing for the post at a depth of 24".

Question: Will there be any electronic security required?

Answer: No. Not for this scope of work.

Question: What are the requirements when the fence crosses a gut?

Answer: A culvert will be placed in those areas by a third party

Question: Will there be roads on one or both sides of the fence?

Answer: There will be a road on one side of the fence (interior)

Question: The standard wire gauges are 11.5, 10.5 and 9 for Anti Climb Fence. Eight (8) gauge would be nonstandard and more expensive. Is it an absolute requirement?

Answer: This is a security fence for a prison to prevent prisoners from escaping the confined areas, thus No. 8 gauge will be used for this project.

Question: Please provide the size of tube for the upright post and horizontal rails and thickness of the steel

Answer: Please see the revised drawings

Question: Are all the fencing materials hot dripped galvanized?

Answer: Yes, except for the stainless steel razor wire. Please see drawings with specifications

Question: Please provide a drawing on the turnaround and full details of specifications

Answer: The scope of work is revised showing a total area of 100'x40' will be paved for the turnaround. A total of 50 tons of asphalt will be used for this purpose.

Question: Government employees at the walkthrough, could not give any further information regarding any questions that were asked.

Answer: Sorry about that but I do hope that all your questions are now addressed.



GOVERNMENT OF
THE VIRGIN ISLANDS OF THE UNITED STATES

PUBLIC WORKS DEPARTMENT
6002 Estate Anna's Hope
Christiansted, St. Croix, V.I. 00820-4428

DIVISION OF ENGINEERING

Tel: (340) 773-1290
Fax: (340) 773-6865

PROJECT:	Scope of Work for the Bureau of Corrections Security Fence	PAGE 1 OF 1 Revised
DATE:	Friday, June 16, 2017	
PREPARED BY:	Eran Flemming	

ITEM	DESCRIPTION OF ITEMS	UNITS	QTY.	UNIT PRICE	COST
Construction of Anti-Climb Fence for the Bureau of Corrections with razor wire and concrete footing					
Total Road Length = 5,992L.F HEIGHT OF FENCE = 8 L.F					
1	Clearing & Grubbing in the area where the fence will be located	L.S	1		
2	Installation of 24L.F wide gate with automatic Control. Electricity will be obtained from the adjacent Pump house	each	1		
3	Installation of 24L.F wide gate without automatic Control.	each	1		
4	Installation of 8 ft. high security fence with anti-climb welded wire mesh fence system, single fabric 1/2"x3"x8gage, standard panel widths 7'-3" for standard 7ft. On center with 18" stainless steel razor wire on top and 12"highx8"thick continuous footing. please see the drawing with specifications.	L.F	5992		
5	Asphalt in place for a paved turn around area to include a decorative island, including clearing & grubbing and some granular fill.	Tons	50		

TOTAL =====>

Total Cost of Project is _____

Licensed Contractor _____


Contractor's Signature _____ Date _____

Eran Flemming 6/16/17
PUBLIC WORKS DEPARTMENT
ST. CROIX
VIRGIN ISLANDS

INDEX TO SHEETS

SHEET NO.	DESCRIPTION
1	TITLE SHEET
2	LOCATION MAP AND PLAN VIEW
3	FENCE/SECTION & POST DETAIL
4	FENCE DETAILS
5	FENCE DETAILS CONNECTIONS
6	FENCE FABRIC DETAILS
7	CONNECTION DETAILS

GOVERNMENT OF VIRGIN ISLANDS
OF THE UNITED STATES
DEPARTMENT OF PUBLIC WORKS
PLANS FOR FENCE CONSTRUCTION
AT THE BUREAU OF CORRECTIONS
IN GOLDEN GROVE, ST. CROIX

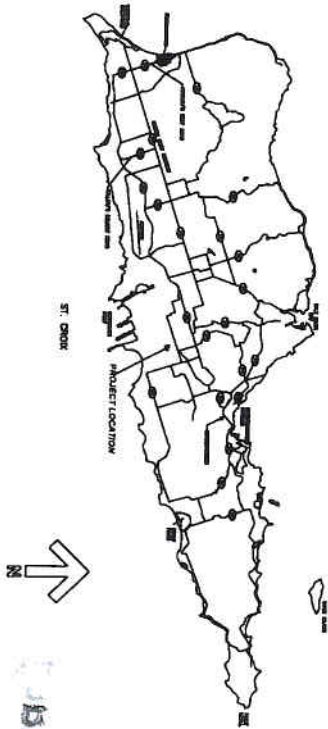

ISLAND OF ST. CROIX


From
St. Croix
6/16/17
BUREAU OF CORRECTIONS
ST. CROIX
VIRGIN ISLANDS




DIVISION OF ENGINEERING
6002 ESTATE ANNA'S HOPE
CHRISTIANSTED, V.I. 00830

APPROVED: _____
DATE: _____
BY: _____
FOR: _____


APPROVED: _____
DATE: _____
BY: _____
FOR: _____

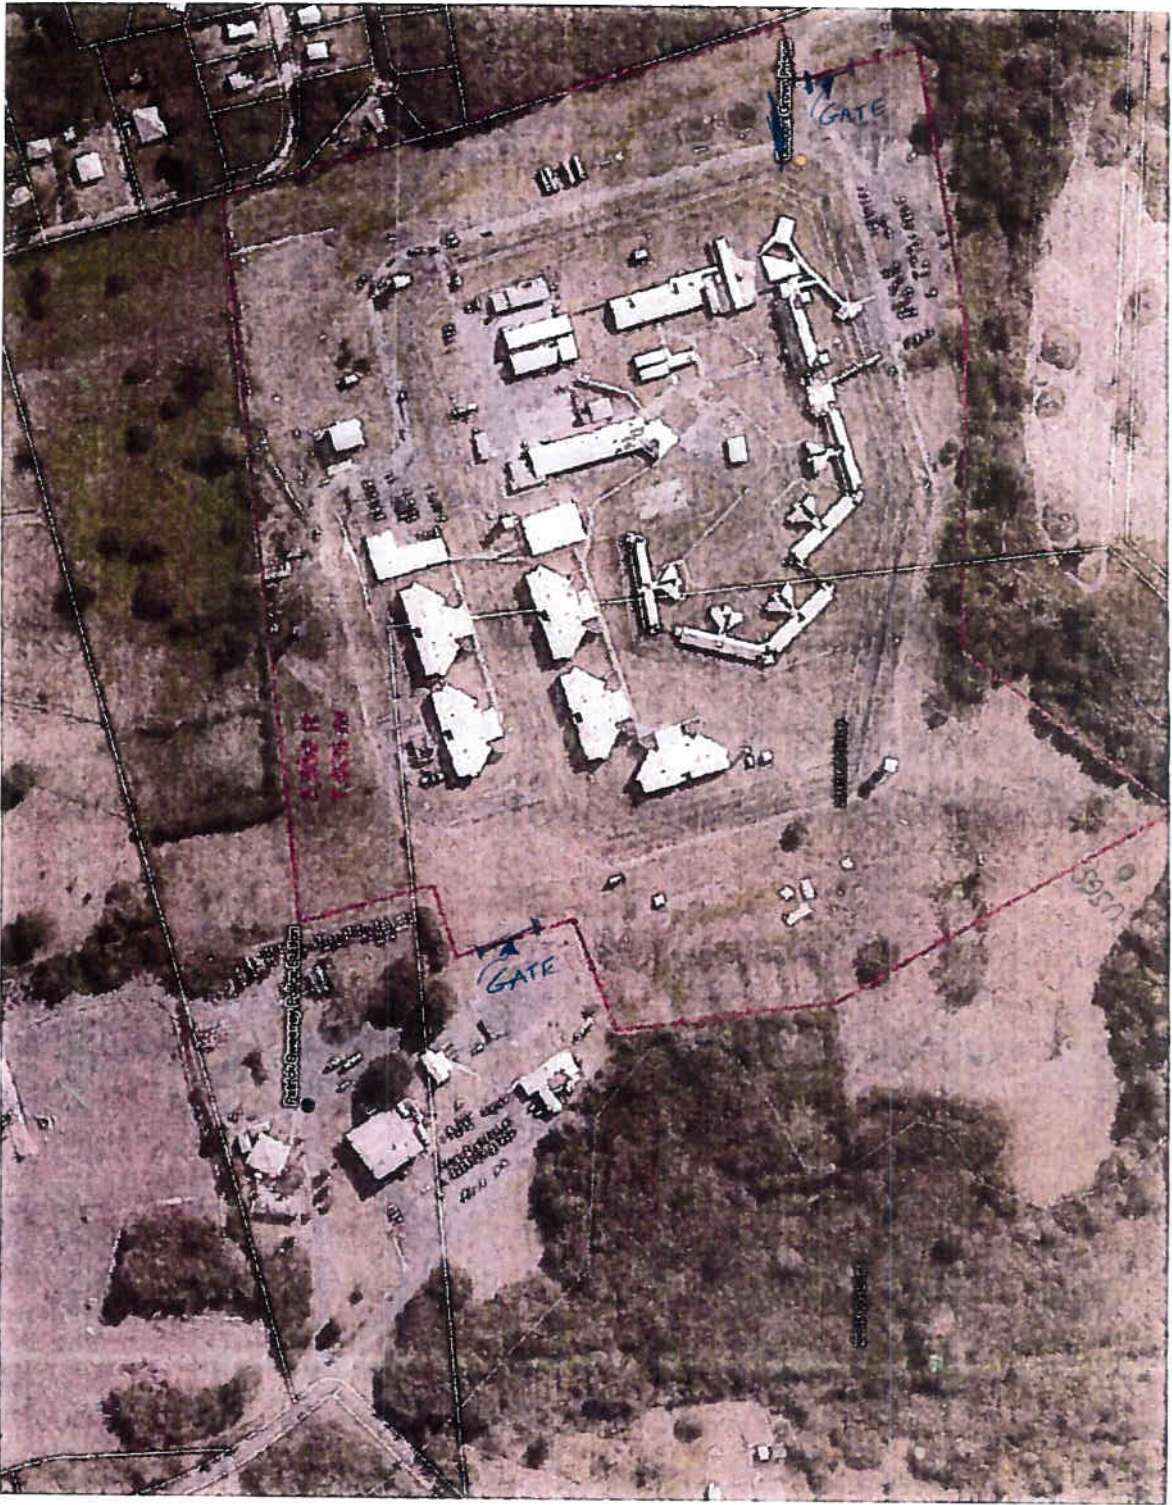




**Bracket Spacing
Not To Exceed
15" o.c.**

END CORNER CONNECTION



POST IN CONCRETE

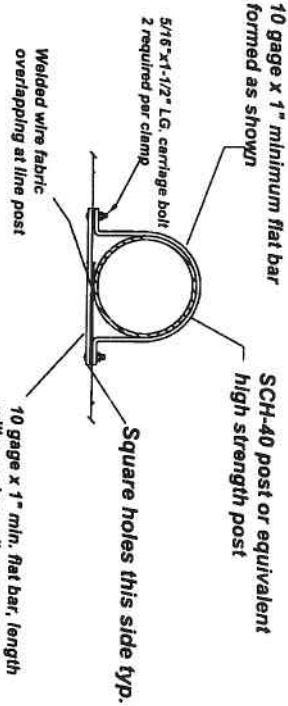

CONNECTION OF FENCE TO POST DETAIL

18" stainless steel razor wire coils

18" stainless steel razor wire coils

HORIZONTAL GALVANIZED RAILS (1-5/8")

Mesh - 1/2" x 3/4" 8 gauge

Attached
Using
Brackets

GALVANIZED POST PLANTED IN CONCRETE

TYPICAL FENCE DETAIL

PORTLAND CEMENT CONCRETE CONTINUOUS FOOTING(8" THICK)
FENCE PANELS SHALL BE SECURED INTO THE CONCRETE

NOTES:

Fittings and accessories, hot-dip zinc coated in accordance with ASTM A 153

Clamps available for 3", 3-1/2", 4", 6-5/8", and 8-5/8" diameter post/
For additional information contact manufacturer.




DIVISION OF ENGINEERING
6002 ESTATE ANNA'S HOPE
CHRISTIANSTED, V.I. 00820

APPROVED
DATE
DESIGNED BY
CHECKED BY

APPROVED
DATE
DESIGNED BY
CHECKED BY

PG-3

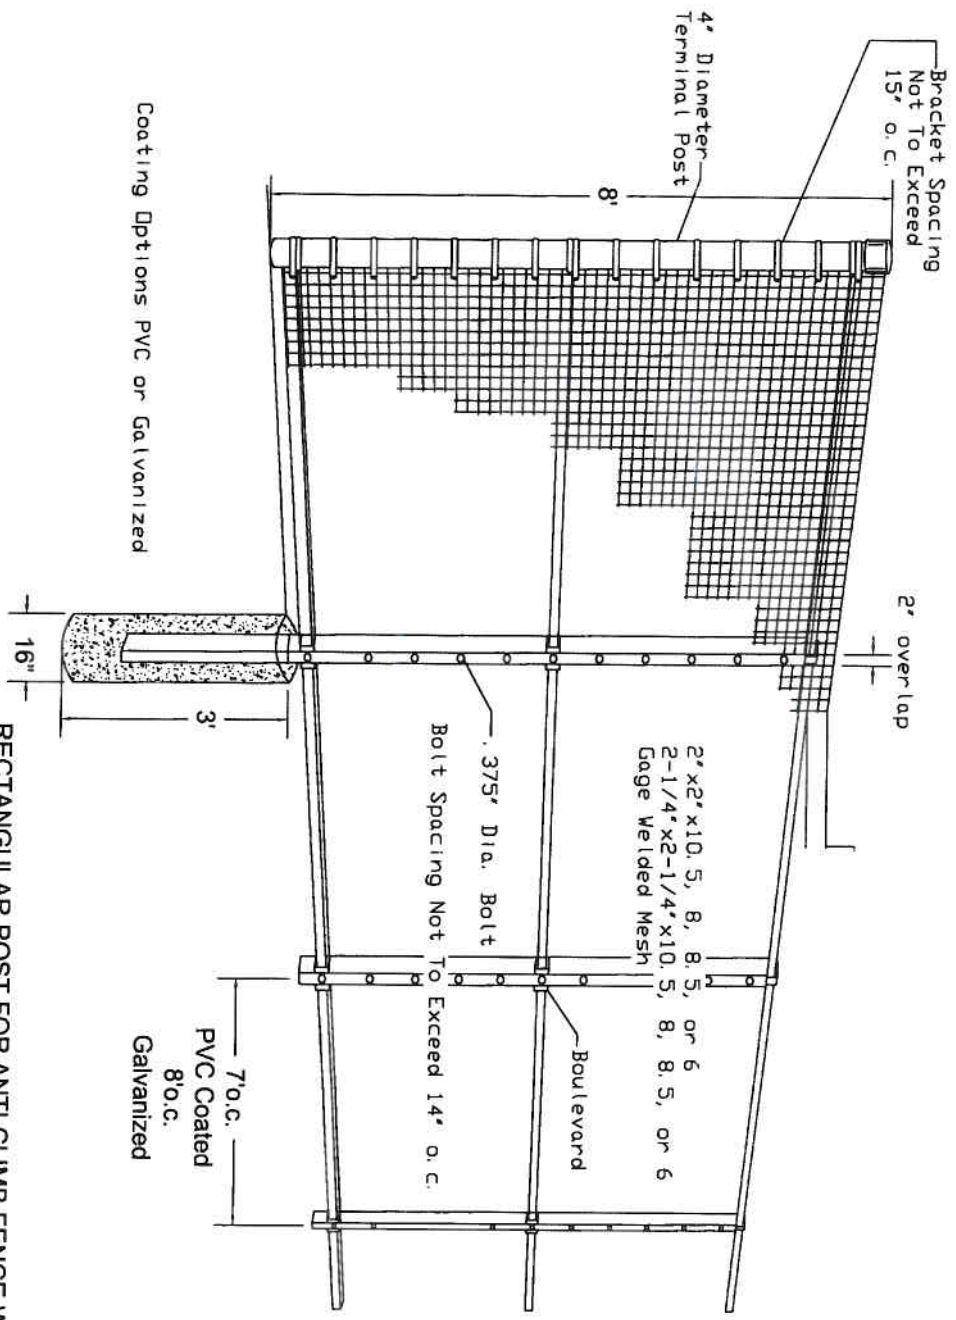


RECTANGULAR POST FOR ANTI-CLIMB FENCE WITH OUT FOOTING





DIVISION OF ENGINEERING
6002 ESTATE ANNA'S HOPE
CHRISTIANSTEDT, VI 00820

APPROVED
DATE: 11/11/11
BY: [Signature]

APPROVED
DATE: 11/11/11
BY: [Signature]

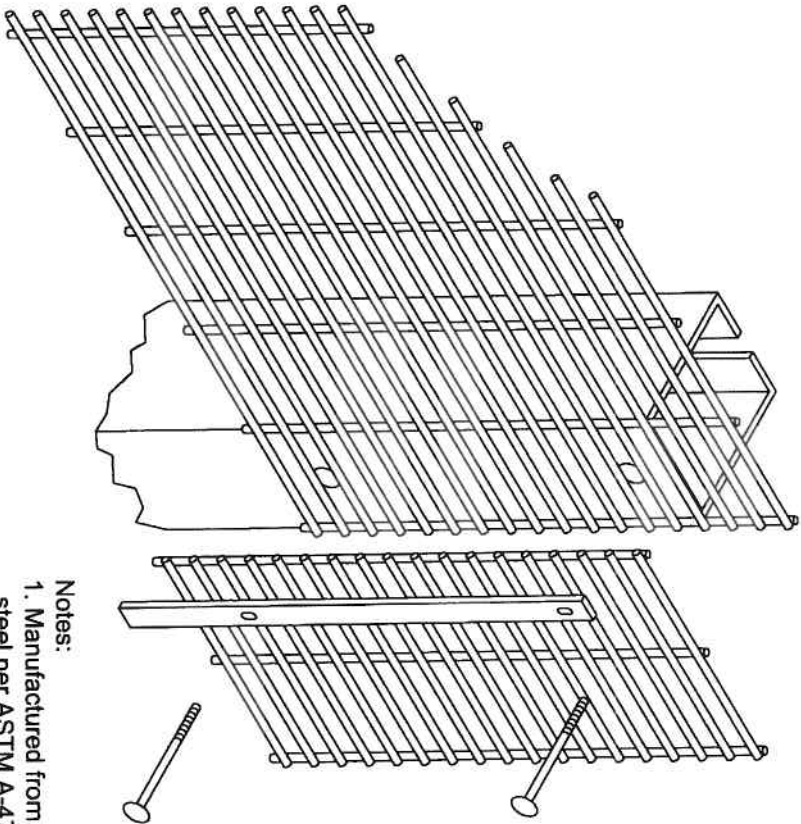

- Notes:
1. Manufactured from 60,000# min yield steel per ASTM A-470 and coated with minimum 2oz zinc per sq. foot per side conforming to ASTM 1043
 2. Wall thickness available in 0.150 and 0.130

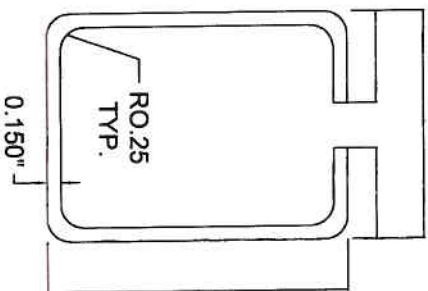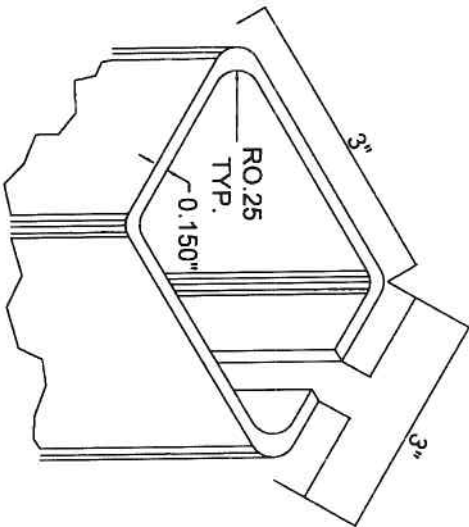

DIVISION OF ENGINEERING
6002 ESTATE ANNA'S HOPE
CHRISTIANSTED, V.I. 00820

APPROVED
FOR FILING IN DATE
BY THE ENGINEER OF PUBLIC WORKS

APPROVED
FOR FILING IN DATE
BY THE ENGINEER OF PUBLIC WORKS

PG-5



Vinyl Clad Fence Fabric or Polyester Coatings:
Contact Manufacturer for Information, Riverdale Mills Corp.
1-800-762-6374




DIVISION OF ENGINEERING
6002 ESTATE ANNA'S HOPE
CHRISTIANSTED, V.I. 000620

APPROVED
EDWARD F. DAVIS
ACTING CHIEF INSPECTOR
DEPARTMENT OF PUBLIC SCHOOLS

APPROVED:
GENERAL MANAGER DATE
CHIEF OF POLICE
DEPARTMENT OF PUBLIC WORKS

PG-6

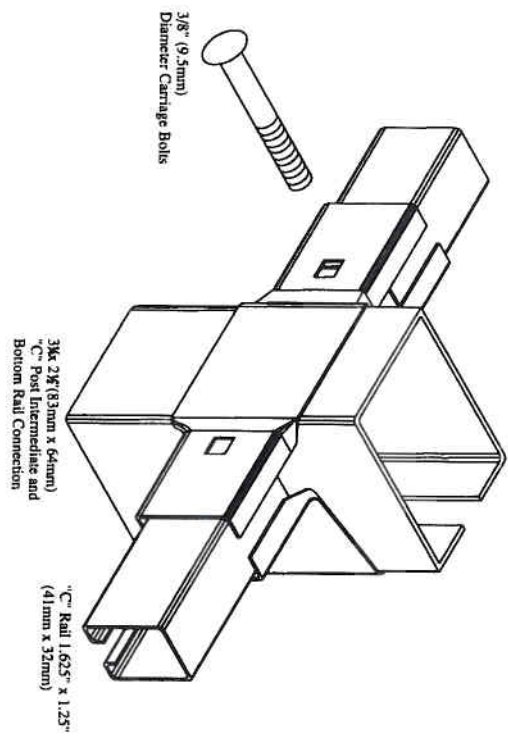

DIVISION OF ENGINEERING
6001 ESTATE AVENUE, SUITE 100
CHRISTIANSBURG, VA 22602

APPROVED
DEPARTMENT OF ENGINEERING
DIVISION OF PUBLIC WORKS

APPROVED
DEPARTMENT OF ENGINEERING
DIVISION OF PUBLIC WORKS

PG-7